

**ALESSI**sense





by  
 **HANSA**

# ALESSI Sense by HANSA

INSTALLATION AND MAINTENANCE GUIDE












### 0773 2201

I (ISO 3822)  
 EN 15091  
 100 - 1000 kPa  
 0.07 l/s (300 kPa w/Controller)  
 max. +70°C

IP 44  
 Lithium 2CR5 6 V

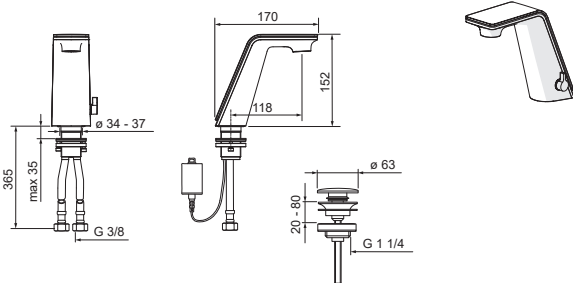




[static.hansa.com/0773\\_2201](http://static.hansa.com/0773_2201)

**CE** (EMC 2004/108/EY)

### 0774 2201


I (ISO 3822)  
 EN 15091  
 100 - 1000 kPa  
 0.07 l/s (300 kPa w/Controller)  
 max. +70°C

IP 44  
 Lithium 2CR5 6 V,  
 AA 1.5 V Lithium x 2, CR 2450 3 V

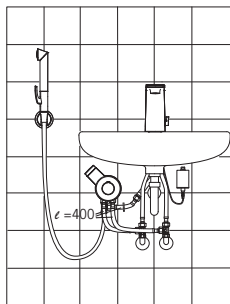
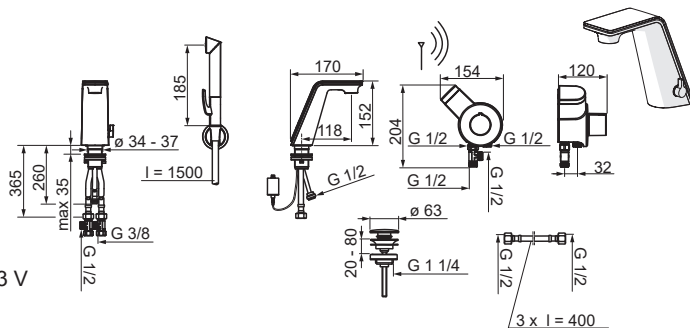



[static.hansa.com/0774\\_2201](http://static.hansa.com/0774_2201)

**CE** (EMC 2004/108/EY)



**1**



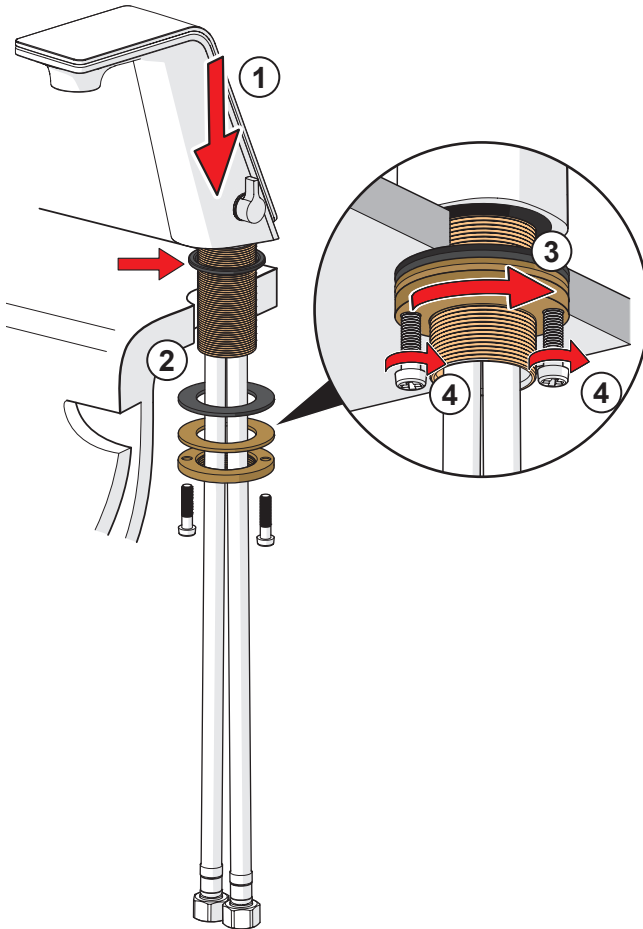





19

① ②




**2** 0773 2201

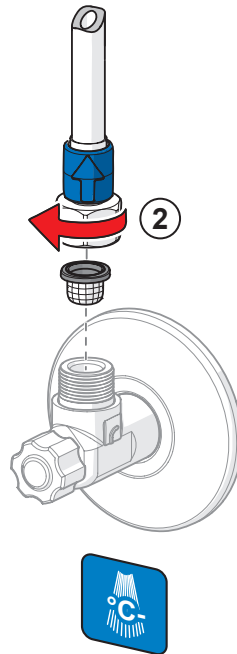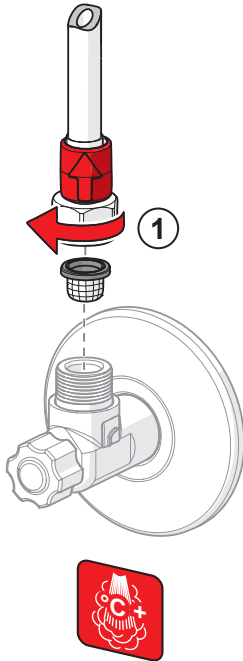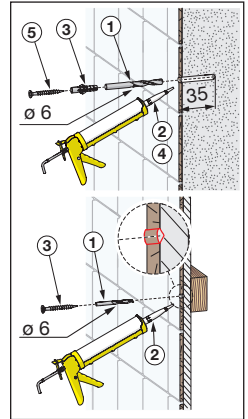




① ... ④





**2** 0774 2201

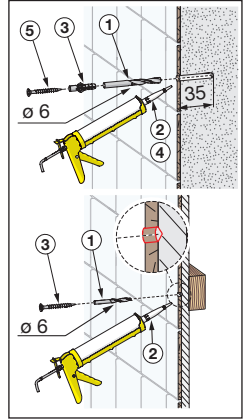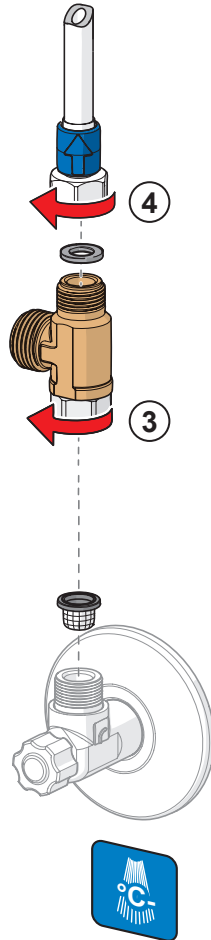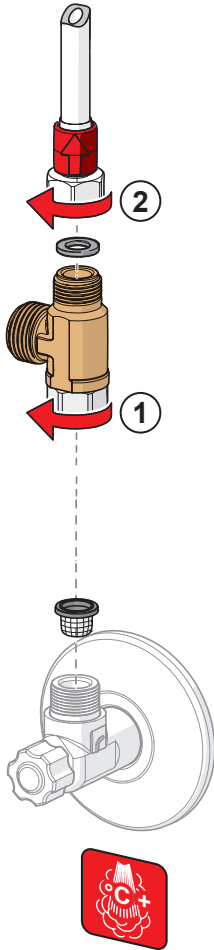




①


③ 0774 2201

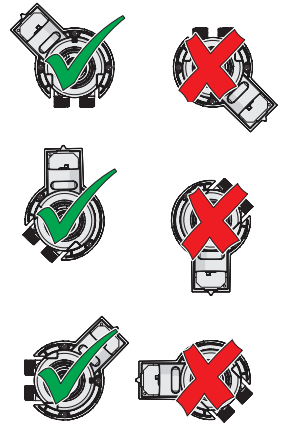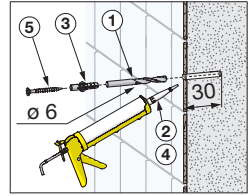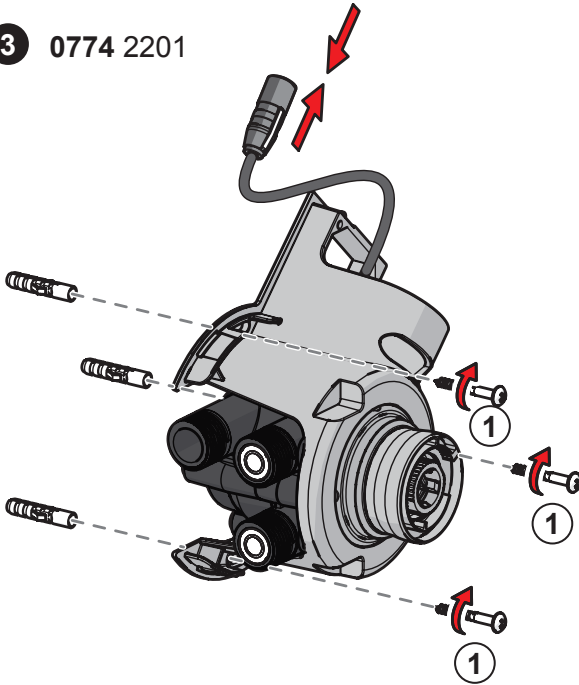





①



② ... ④


⑥ ... ⑨



④ ... ⑥

⑧


**4** 0774 2201

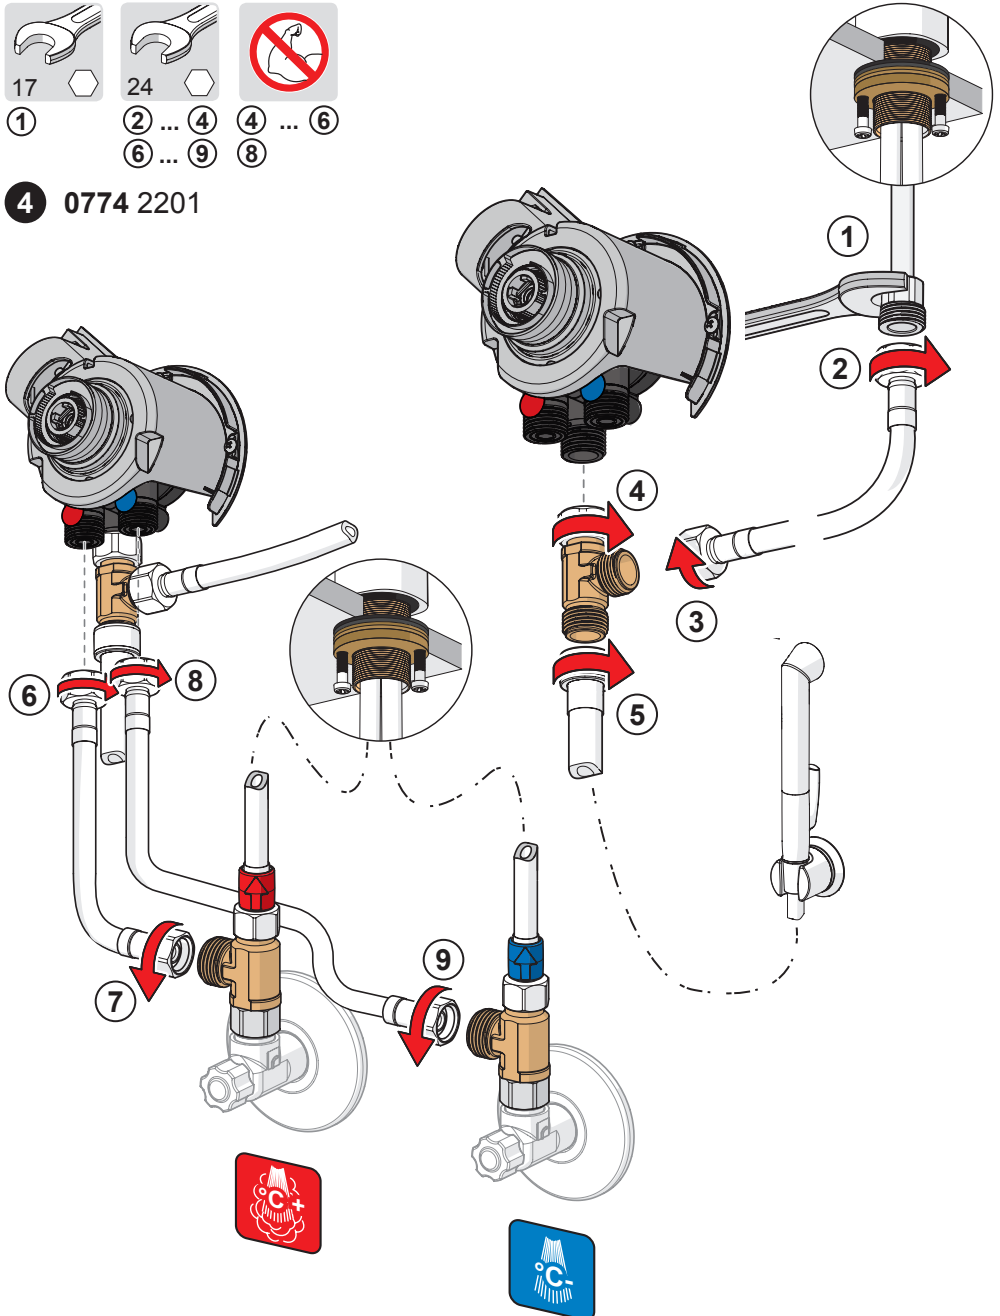




**5** 0774 2201

AA 1.5V x 2  
Lithium

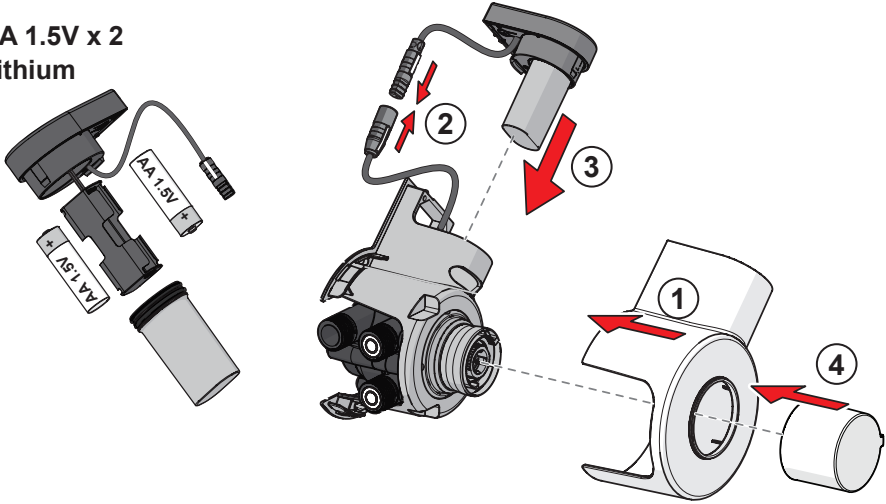


**6**


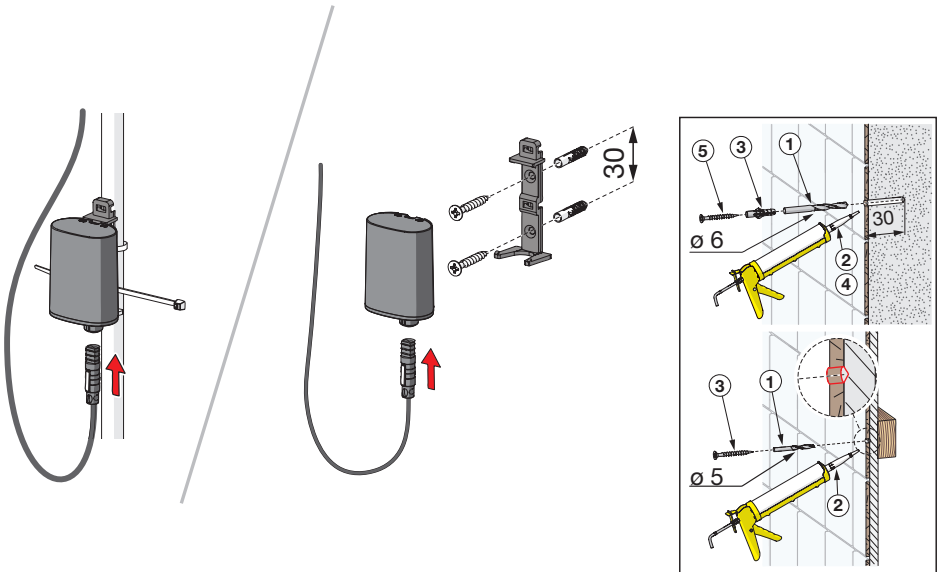




**7**




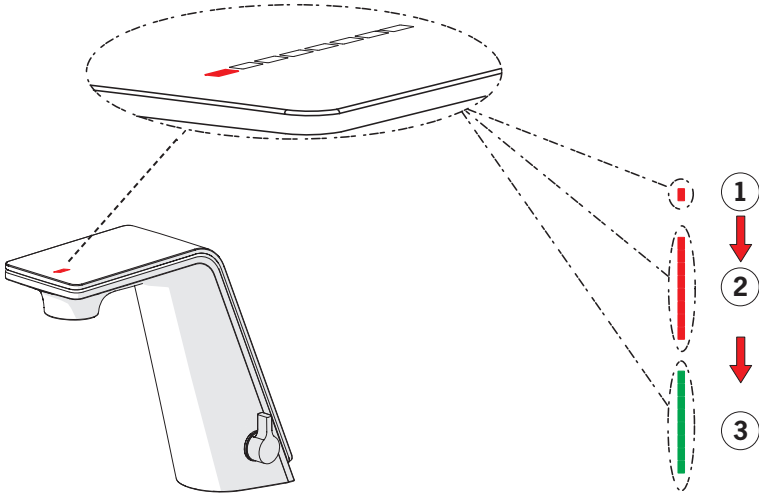


**8** 0774 2201

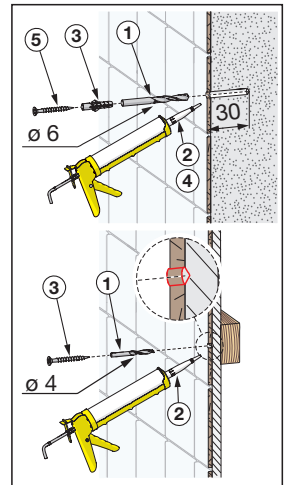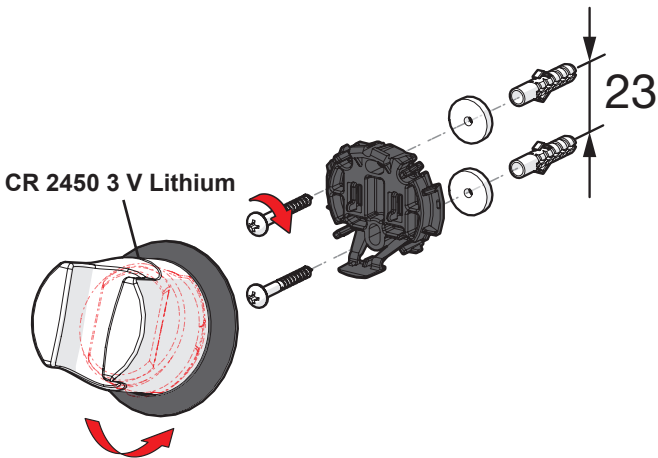




0774 2201

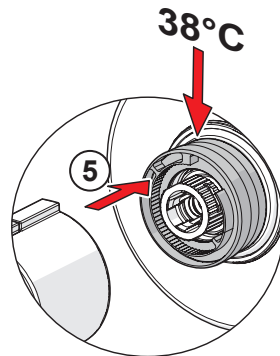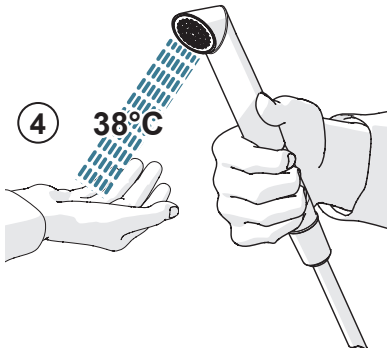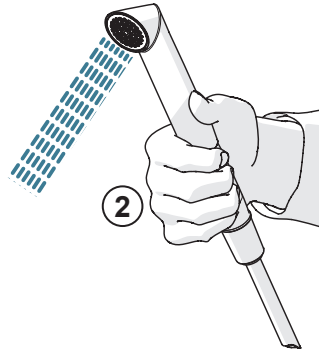
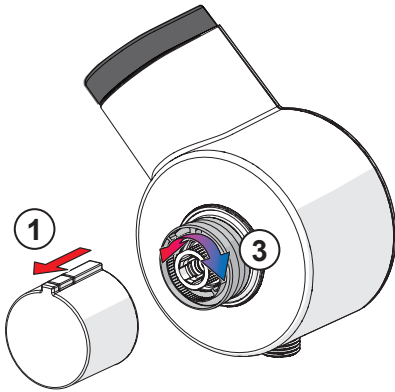







① ③



②

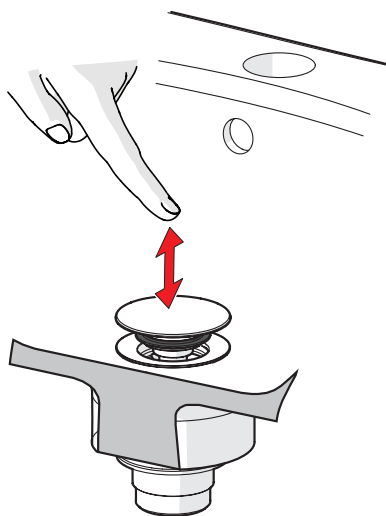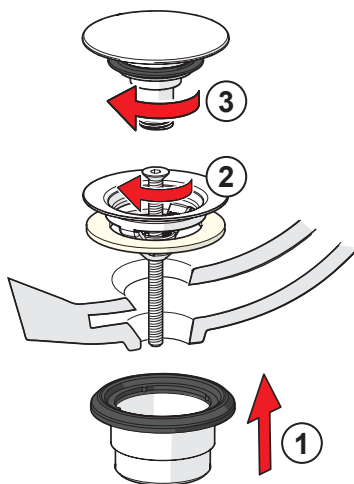

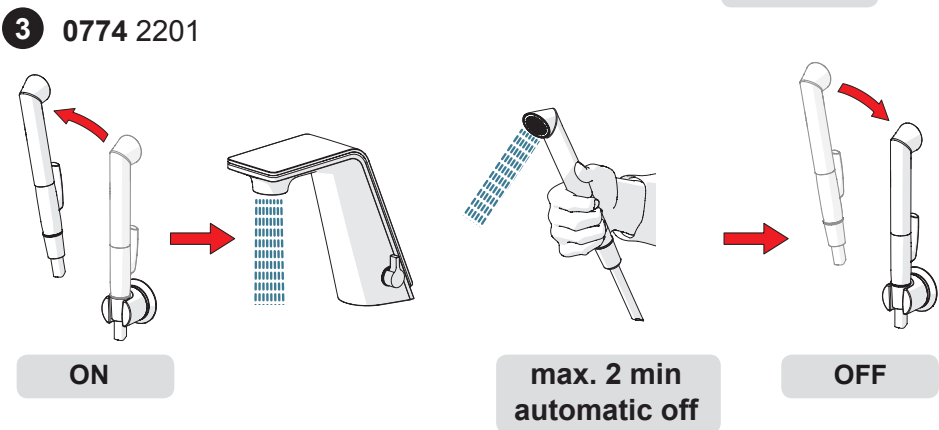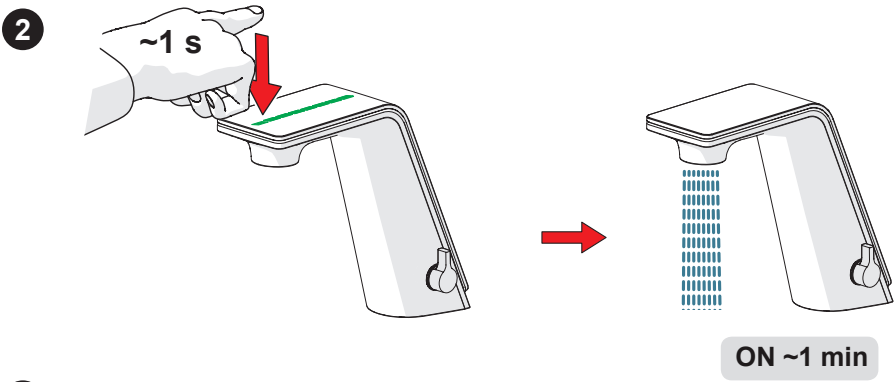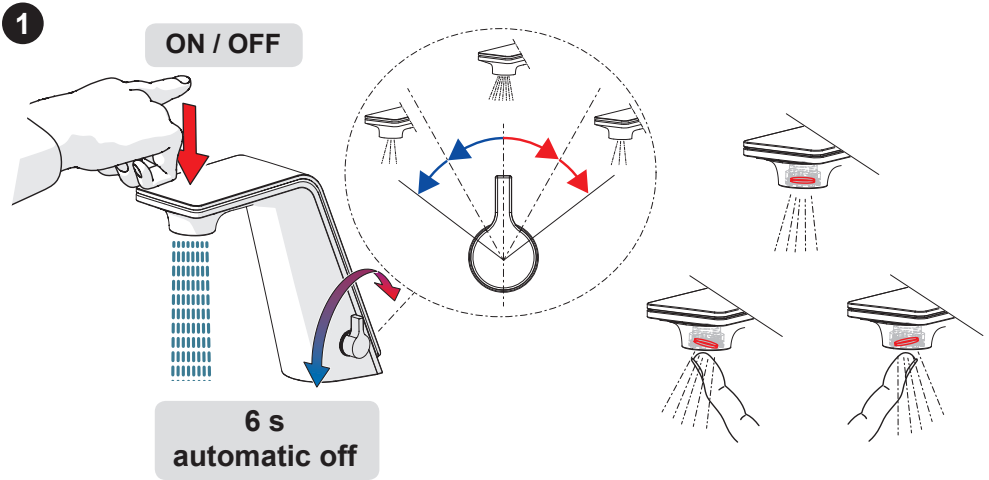





- 1) Short lights OFF
- 2) Short lights ON
- 3) Factory settings





Factory default	1 x	2 x	3 x	4 x	5 x	6 x	7 x	8 x
Max short flow (sec)	1 x	6	8	10	15	20	30	60
Max long flow (sec)	2 x	30	45	90	120	240	300	600
Automatic flush (h)	3 x	0	12	24	48	72	-	-
Automatic flush (sec)	4 x	10	30	60	120	180	240	300
Operation mode	5 x	OFF <sup>1)</sup>	ON <sup>2)</sup>	FS <sup>3)</sup>	-	-	-	-

### Example 1: Max short flow 6 s → 30 s

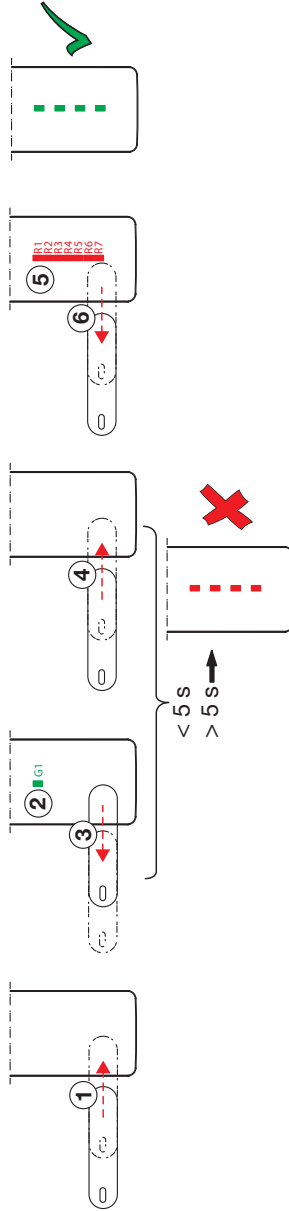

### Example 2: Operation mode → FS = factory settings

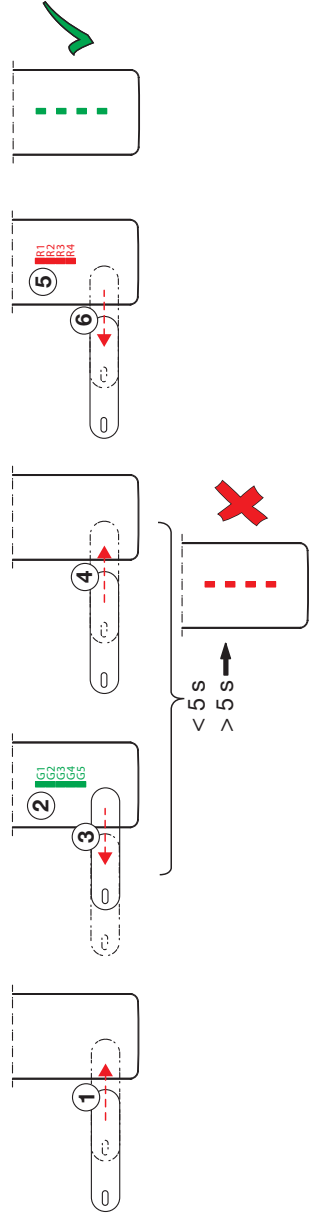

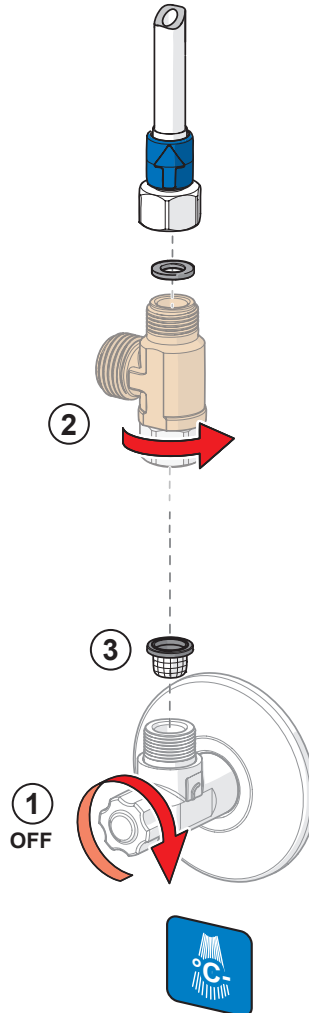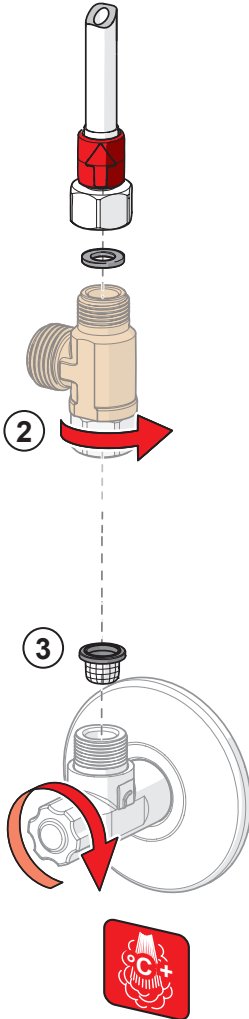







①

1

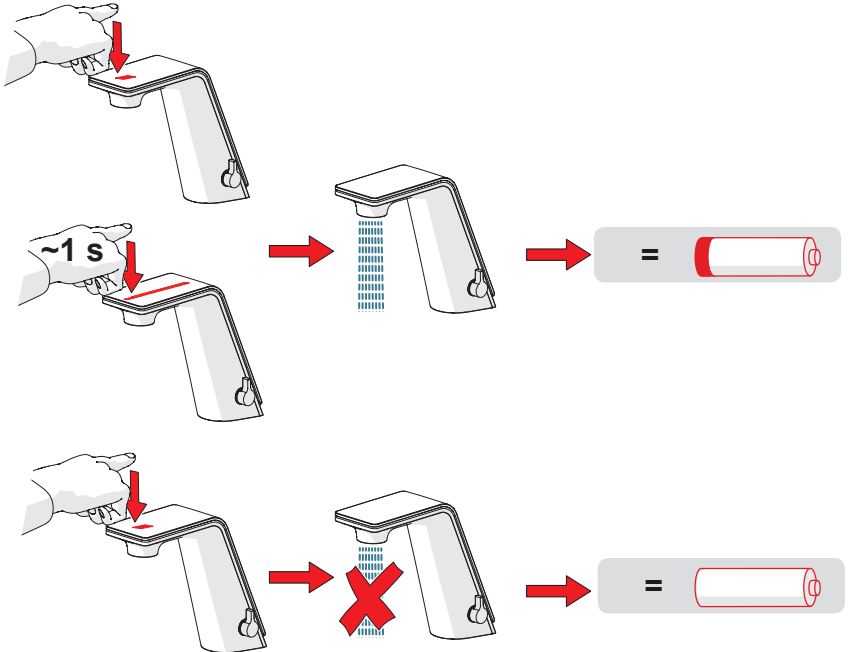

2

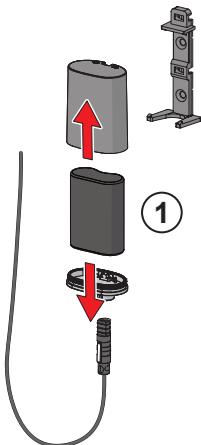




Lithium  
CR2450 3 V





④

① 0774 2201

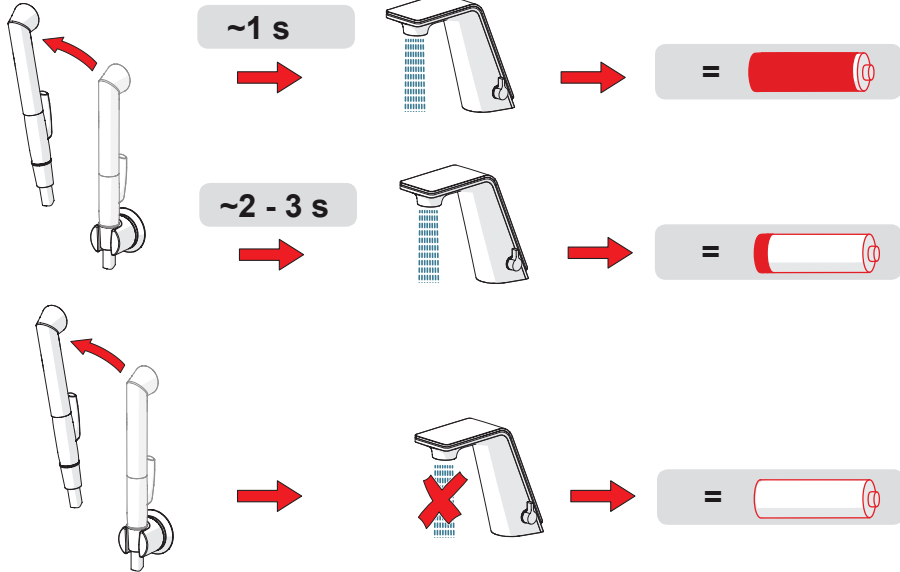


②

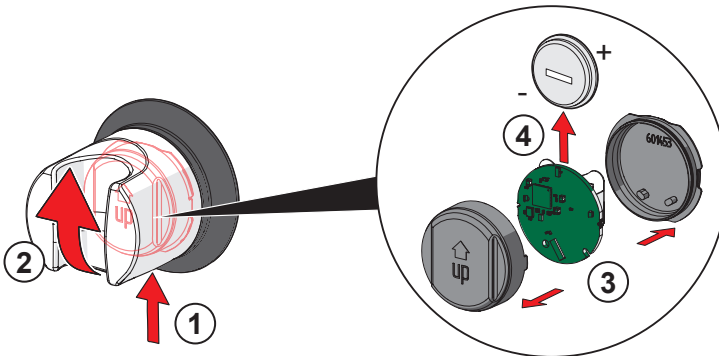










②

① 0774 2201

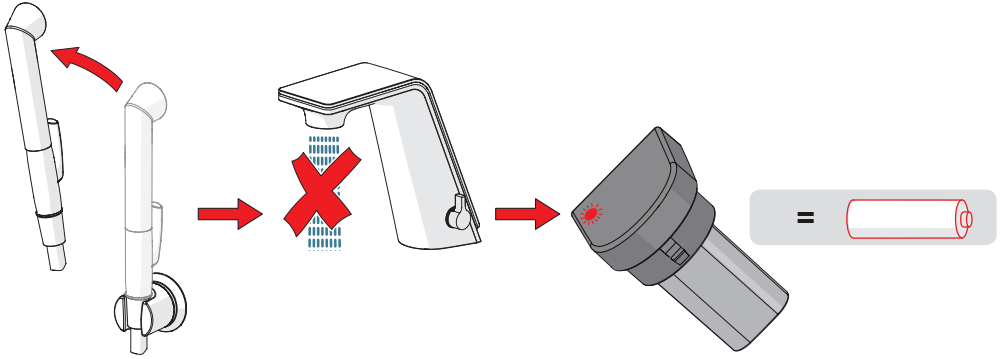

②

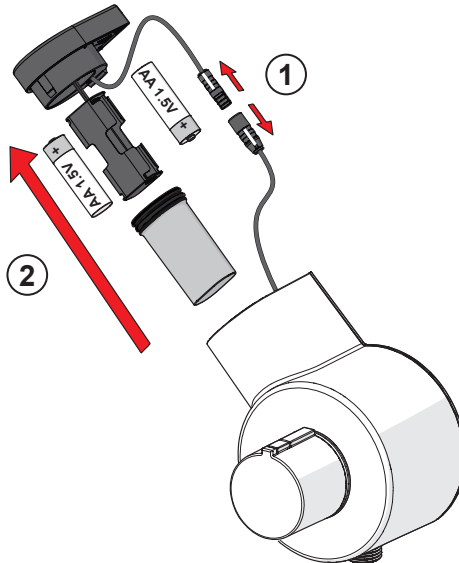


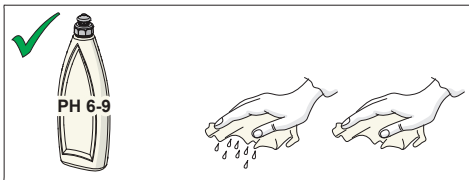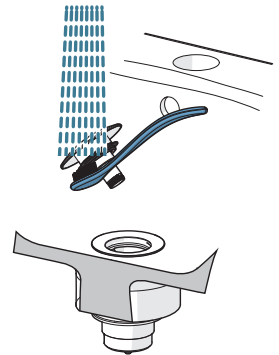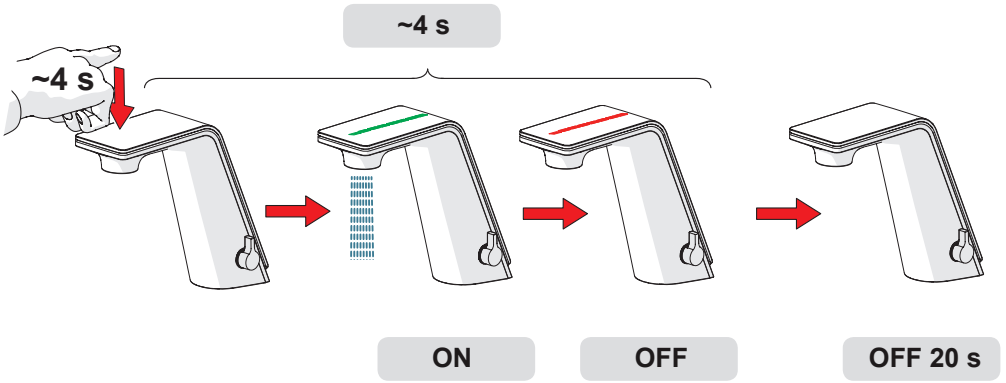




**0773 2201**

- 1 59 914 439
- 2 59 914 440
- 3 59 914 441
- 4 59 914 442
- 5 59 914 443
- 6 59 914 444
- 7 59 914 088
- 8 59 911 670
- 9 59 913 988
- 10 59 914 772
- 11 59 914 136

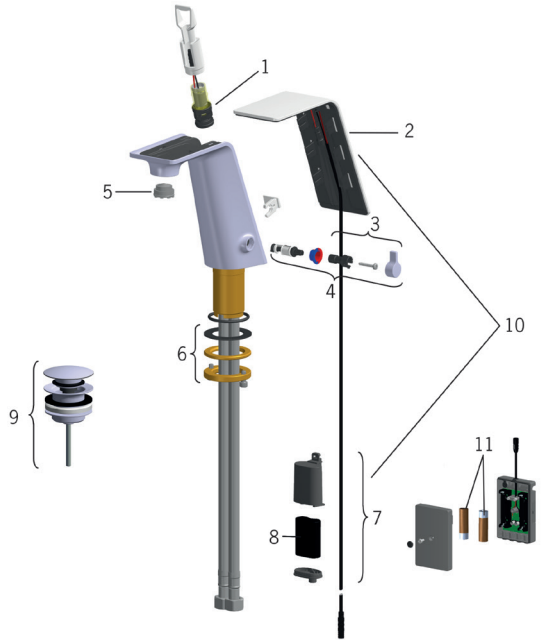

**0774 2201**

- 1 59 914 439
- 2 59 914 440
- 3 59 914 441
- 4 59 914 442
- 5 59 914 443
- 6 59 914 444
- 7 59 914 088
- 8 59 911 670
- 9 59 914 133
- 10 59 914 134
- 11 59 914 114
- 12 59 914 113
- 13 59 914 125
- 14 59 914 126
- 15 59 914 135
- 16 59 914 251
- 17 59 914 137
- 18 59 913 988
- 19 59 914 136
- 20 59 914 772

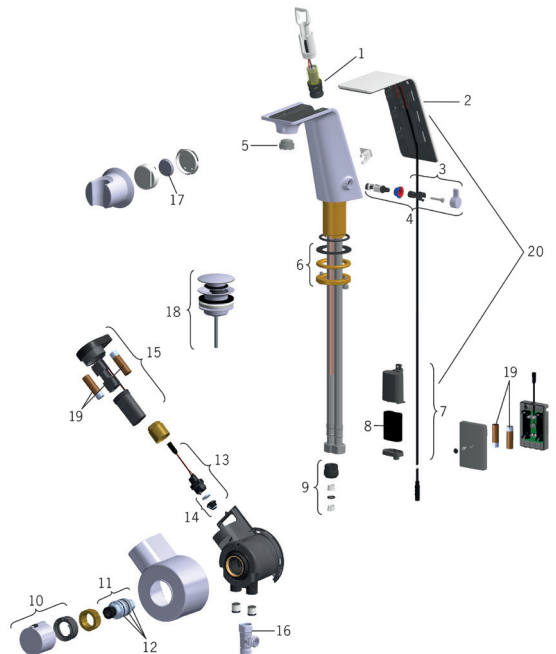





Oras Group is a powerful European provider of sanitary fittings: the market leader in the Nordics and a leading company in Continental Europe. The company's mission is to make the use of water easy and sustainable and its vision is to become the European leader of advanced sanitary fittings. Oras Group has two strong brands, Oras and Hansa.

The head office of the Group is located in Rauma, Finland, and the Group has three manufacturing sites: Kralovice (Czech Republic), Olesno (Poland) and Rauma (Finland). Oras Group employs approximately 1400 people in twenty countries. Oras Group is owned by Oras Invest, a family company and an industrial owner.

HANSA Armaturen GmbH  
P. O. BOX 81 02 40  
D-70519 Stuttgart

Sigmaringer Strasse 107  
D-70567 Stuttgart  
Tel.: +49 711 16 14 0  
Fax: +49 711 16 14 368  
info@hansa.de

**[www.hansa.com](http://www.hansa.com)**



a member of  orasgroup